
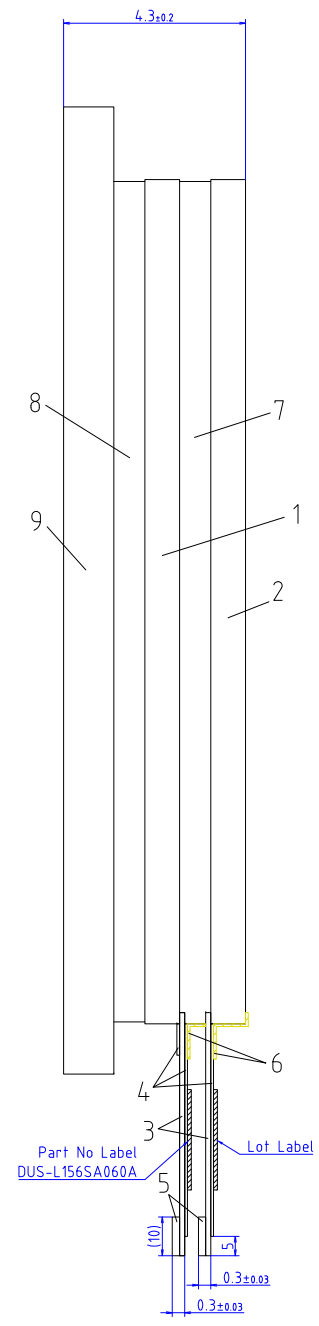


CN-1 PinOut		CN-2 PinOut	
1	NC	1	Dummy
2	NC	2	X00
3	NC	3	X01
4	NC	4	X02
5	NC	5	X03
6	NC	6	X04
7	NC	7	X05
8	NC	8	X06
9	NC	9	X07
10	NC	10	X08
11	NC	11	X09
12	NC	12	X10
13	NC	13	X11
14	NC	14	X12
15	NC	15	X13
16	NC	16	X14
17	NC	17	X15
18	NC	18	X16
19	NC	19	X17
20	NC	20	X18
21	NC	21	Dummy
22	Y00	22	X20
23	Y01	23	X21
24	Y02	24	X22
25	Y03	25	X23
26	Y04	26	X24
27	Y05	27	X25
28	Y06	28	X26
29	Y07	29	X27
30	Y08	30	X28
31	Y09	31	X29
32	Y10	32	X30
33	Y11	33	X31
34	Y12	34	X32
35	Y13	35	X33
36	Y14	36	X34
37	Y15	37	X35
38	Y16	38	X36
39	Y17	39	X37
40	Y18	40	X38
41	Y19	41	X39
42	Y20	42	X40
43	Y21	43	X41
44	Y22	44	X42
45	Y23	45	X43
46	Y24	46	X44
47	Y25	47	X45
48	Y26	48	X46
49	Y27	49	X47
50	Y28	50	X48
51	Y29	51	X49
52	Y30	52	Dummy
53	Y31	53	NC
54	Y32	54	NC
55	Dummy	55	NC
		56	NC
		57	NC
		58	NC
		59	NC
		60	NC
		61	NC
		62	NC
		63	NC
		64	NC
		65	NC
		66	NC
		67	NC
		68	NC
		69	NC
		70	NC
		71	NC
		72	NC
		73	NC
		74	NC
		75	NC
		76	NC
		77	NC
		78	NC
		79	NC
		80	NC

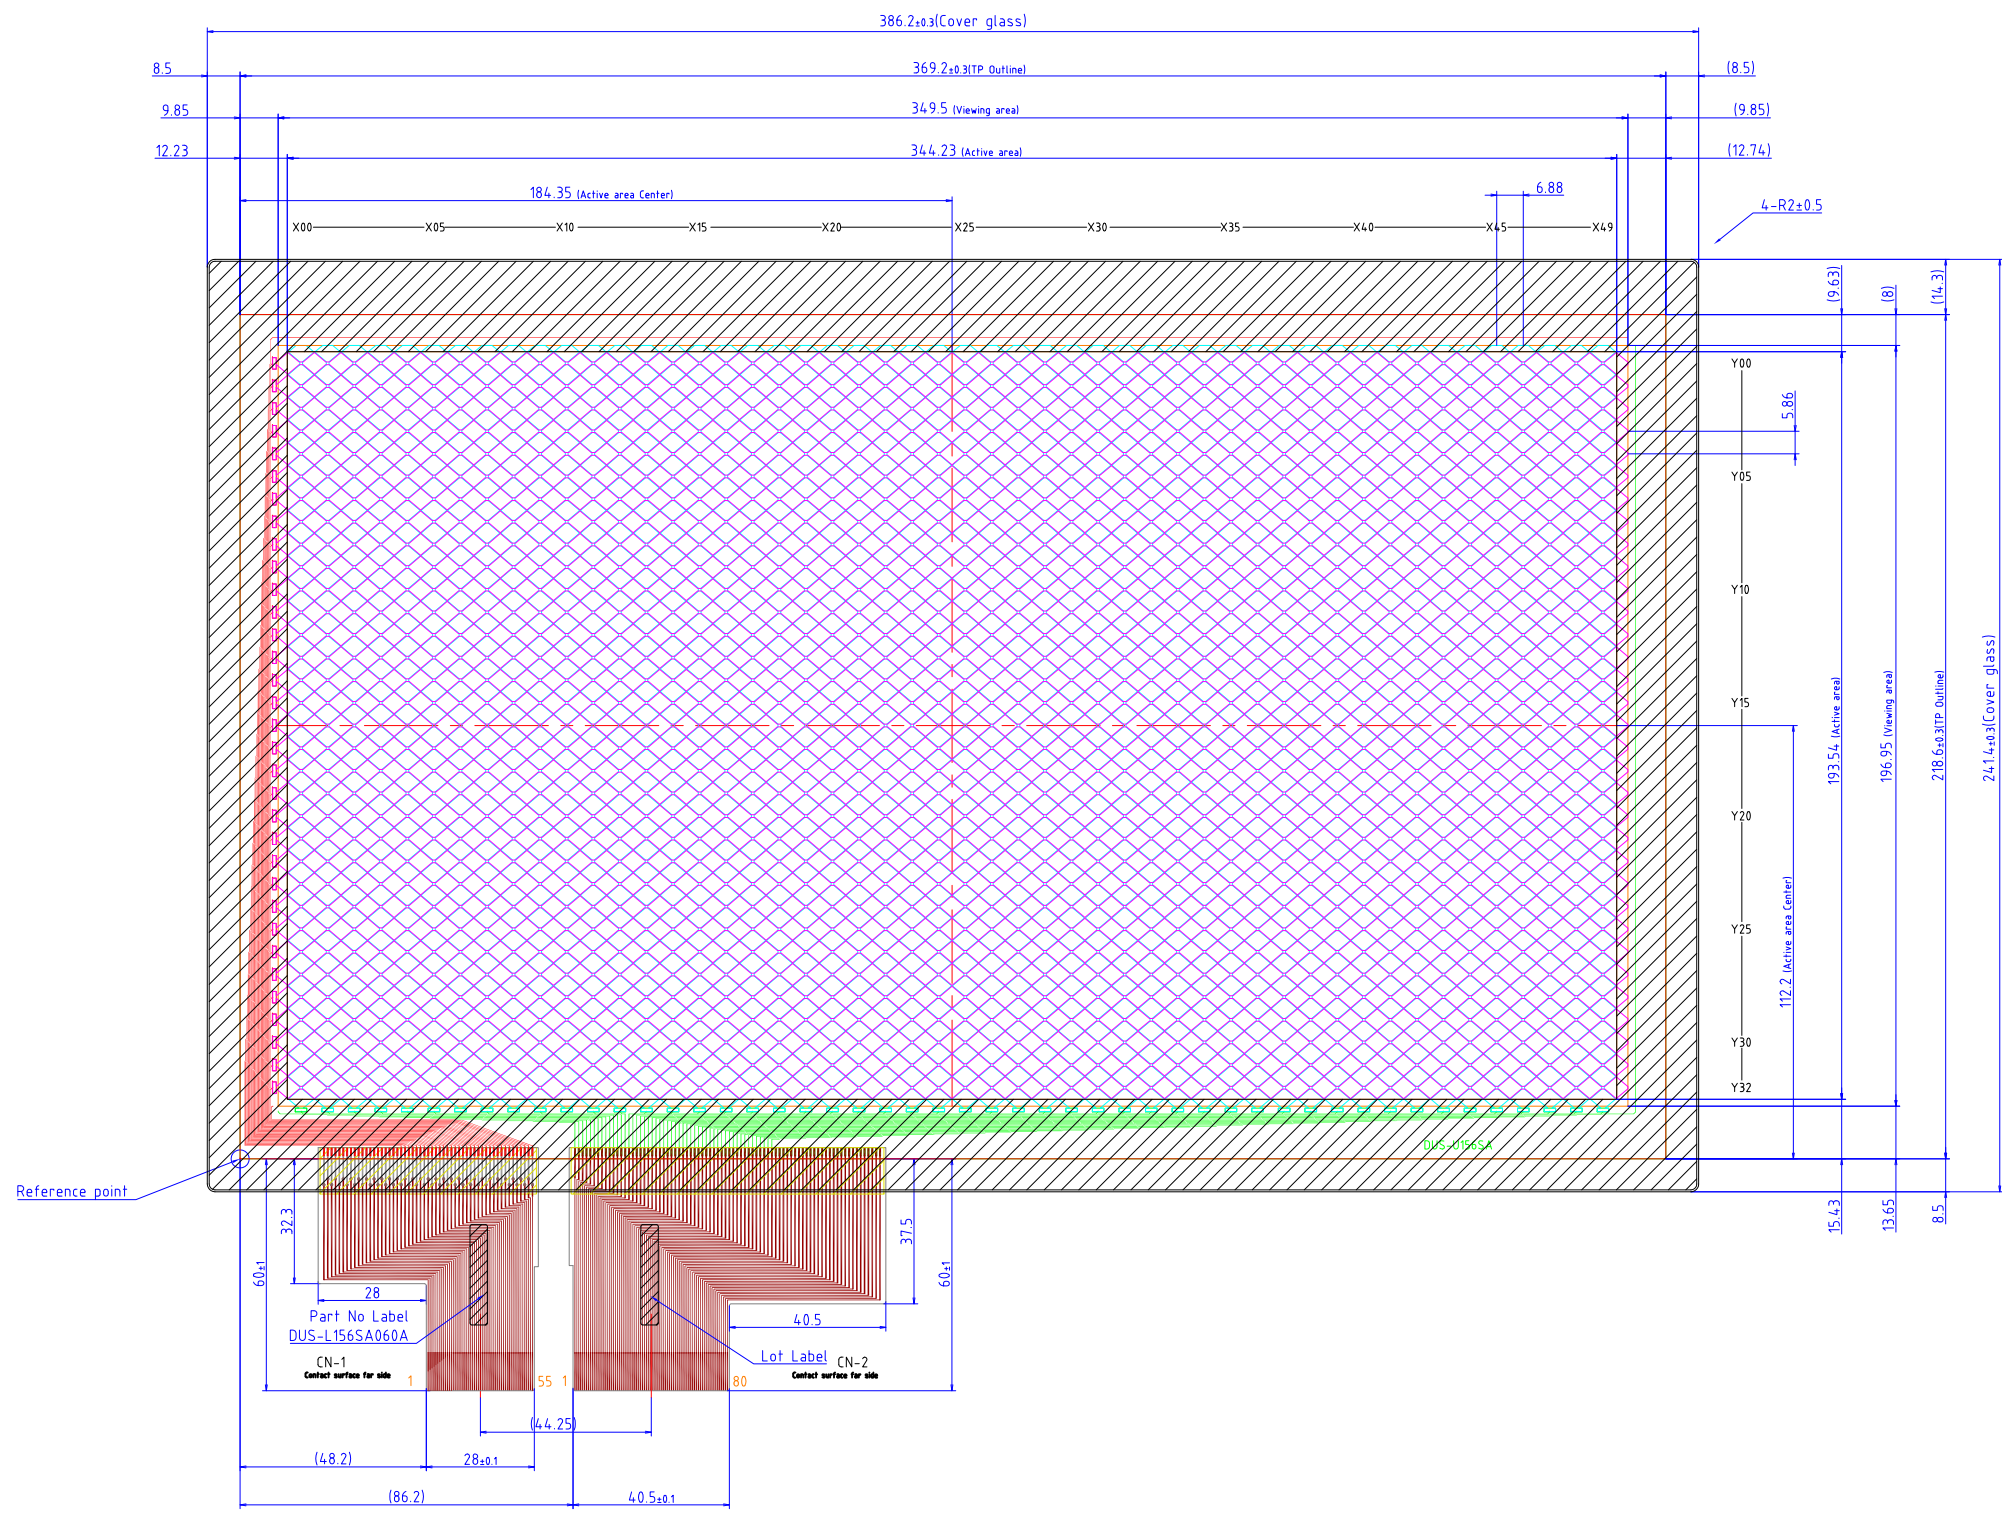

REMARKS	
TAIL PATTERN PITCH	0.5mm
TAIL PATTERN WIDTH	Cu 0.2-0.4mm
	- mm
CIRCUIT PATTERN WIDTH	Ag 0.1mm
	- mm
○RED: TOP CIRCUIT, GREEN: BOTTOM CIRCUIT. ○PURPLE: TOP CIRCUIT, LIGHT BLUE: BOTTOM CIRCUIT. ○TOLERANCE=0.3mm EXCEPT WHERE INDICATED.	

ITEM	MATERIAL	REMARKS
1 TOP ITO GLASS	t=1.1mm	IM Glass
2 BOTTOM ITO GLASS	t=1.1mm	IM Glass
3 FPC	POLYIMIDE 25μm	COPPER Max= NICKEL PLATING 3μm GILDING 0.1μm
4 REINFORCEMENT FILM	POLYESTER 25μm	
5 STIFFENER	POLYESTER 188μm	
6 PROTECTION TAPE	POLYESTER 25μm	
7 ADHESIVE SHEET	150μm	
8 ADHESIVE SHEET A	150μm	
9 COVER GLASS	t=1.8mm	Chemical glass/Black printing/Chemical strengthening

**ULTRATRONIK**  
www.ultratronik-distribution.de

CUSTOMER APPROVAL

DATE: / /

PART No.		APPROVED	CHECKED	CHECKED	TRACED	DESIGNED
DUS-L156SA060A		Nov/25/14 HIRATA		Nov/25/14 MIYAMOTO	Nov/25/14 INOUE	INOUE
TYPE		Project Capacitive Touch Screen				
CIRCUIT DRAWING		DMC Co., Ltd.				