


- Note:
- Tolerance is ±0.5 unless otherwise noted.
 - * is important dimension. ① ~ ⑨
 - Center brightness: 250 cd/m² (Typ.), 200 cd/m² (Min.)
 - LCM connector: JAE FI-XB30SSL-HF15 or equivalent.
LCM matching connector: JAE FI-X30HL or equivalent.
 - B/L connector: E&T 3808K-F05N-02R or equivalent.
B/L matching connector: E&T H208K-P05N-02B or equivalent.
 - CTP connector: E&T 3802K-E05N-01R or equivalent.
CTP matching connector: E&T H201K-D05N-12B or equivalent.
 - CTP IC: EXC 3188
 - Torque of M3 user hole should be within 4 kgf-cm and re-screw 10 times.
 - M3 screw length is 4.2mm Max.
 - For RoHS.

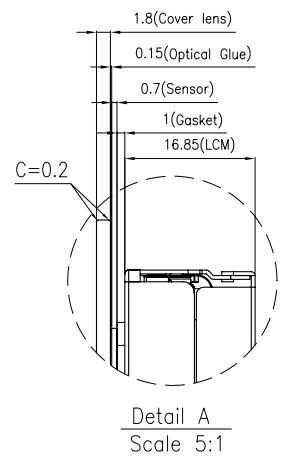

CTP PIN DEFINE		B/L PIN DEFINE	
1.GND	4.D+	1.Vcc	
2.VDD	5.D-	2.GND	
3.GND		3.Enable	
		4.Dimming	
		5.NC	

LCM PIN DEFINE					
1	Reserved	11	RXIN2-	21	Reserved
2	Reserved	12	RXIN2+	22	Reserved
3	Reserved	13	GND	23	GND
4	GND	14	RXCLKIN-	24	GND
5	RXIN0-	15	RXCLKIN+	25	GND
6	RXIN0+	16	GND	26	AVDD
7	GND	17	RXIN3-	27	AVDD
8	RXIN1-	18	RXIN3+	28	AVDD
9	RXIN1+	19	GND	29	AVDD
10	GND	20	Reserved	30	AVDD

				DATE:	2015/10/29	TITLE:				
				DRAWN:		15.6" Module with CTP outline dimension.				
				CHECK:		DWG. NO.	SCF1506188GGU02			
				APPROVE:		UNITS	M M	REV.	1	
AUTH				DESCRIPTION	DATE	APPROVED	SCALE	1 / 1		
REVISIONS										